

INSTALLATION INSTRUCTIONS

primo



PRIMO CANOPY LIGHT IP69K IK06 HACCP CERTIFIED


CE10K60-850	60W	10,000LM
CE16K100-850	100W	16,000LM
CE24K150-850	150W	24,000LM

General Safety Information

- Installation, commissioning and maintenance only by qualified electrician.
- Never perform any work on the luminaire with voltage applied. Danger to life due to electric shock!
- Electric connection must be appropriate according to all applicable standards and other national and international safety and accident prevention regulations.
- Damaged luminaires must not be operated.
- Observe and retain safety instructions and mounting instructions
- No liability is accepted for damages resulting from improper use.
- Use genuine parts only for repair.

Dimensions

55.7mm  41mm




Integrated Microwave Sensor

Primo Canopy Lights have an integrated microwave sensor capable of dimming the unit when no motion is detected, and switching off the unit in periods of extended vacancy.

The microwave sensor is deactivated out of the box. It must be programmed using the IR programming remote control unit. These can be ordered from your electrical wholesaler from Tigerlight. Part number is CE-REMOTE.

Primo Canopy lights can be installed and programmed from ground level after installation. Each individual unit needs to be programmed. The remote has a range of 15m. Each individual unit needs to be programmed.

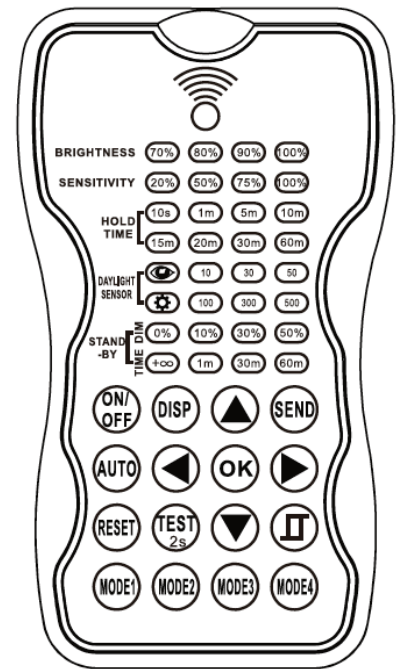

Part number: CE-REMOTE

Programming options

Brightness

% of maximum luminaire output 70% 80% 90% 100%

Sensitivity

Sensitivity of microwave sensor 20% 50% 75% 100%

Hold Time

Time in bright mode after last motion detected 10s 1m 5m 10m 15m 20m 30m 60m

Dim Level

% of maximum luminaire output while in dim mode 0% 10% 30% 50%

Standby time

Time in dim mode before switching off OFF 1m 30m 60m

Scan the QR code for instructions on using the programming remote and its functionality.

