

LED WALLPACK LIGHT

Sentry Wallpack

40W 5,500 lm

80W 11,500 lm



Class-leading performance - 140 lm/W
IP69 & IK10 for ultra-dependable performance
Polycarbonate T3M batwing lenses.



~140 LUMENS
PER WATT



T3M LENSES



IP67
RATING



IK10
RATING



5000K
PLUS OPTIONS



50,000+
HOURS



5 YEAR
WARRANTY

ROBUST & RELIABLE MODULAR BUILD

40W (5,500 lm) or 80W (11,500 lm)
Constructed for long-term reliability & longevity
Rated IP67 and IK10
Heavy duty polycarbonate lenses - no glass
T3M lenses for optimum light distribution
Quick and easy to install
50,000+ hours service life and 5 years warranty.

APPLICATIONS

- Security lighting around building exteriors
- Illuminating private roadways, walkways, exits and entrances
- Commercial & industrial premises, municipal areas, school & university grounds, shopping centres and other public spaces.



MODULAR DESIGN & CONSTRUCTION

Modular design - 40W LED modules
Separate driver compartment
Polycarbonate lens plates - no glass
Polyester coated aluminium housing
Meets 1000 hour salt mist test standard
Rated IP67 and IK10 for ultimate durability.




40W - 1 x 40W module




80W - 2 x 40W modules

OPTICAL LENSES & OPTIONS


T3M lenses standard for optimum distribution at normal spacings and mounting heights.



Other asymmetric lens options include T2S, T4VS, T4S, T4M

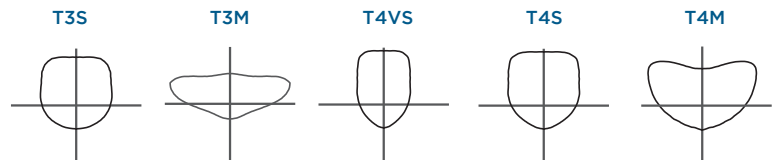

PHYSICAL DIMENSIONS

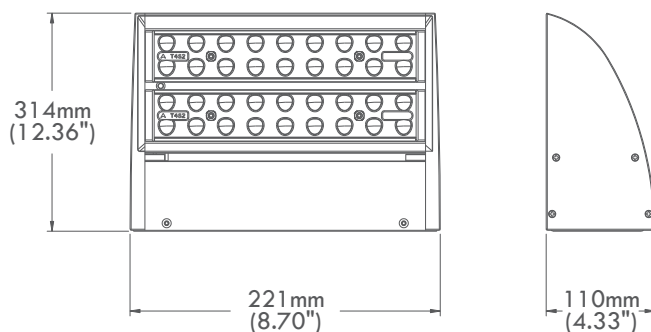

COLOUR TEMP OPTIONS

5000K is standard CCT.

Other options are available on special order.
Options include:

- Amber (turtle firendly)
- 3000K
- 4000K
- 5700K.

TECHNICAL PARAMETERS

Power consumption	40W	80W	IP Rating / IK Rating	IP67 / IK10
Input voltage & frequency	100-277VAC; 50/60Hz		Composition - lens	Polycarbonate - no glass
LED chip drive current	700mA		Composition - housing	Aluminium with min 100 micron polyester coating
Power factor/THD	>0.9 at full load / <20% at full load		Housing colour	Black standard. Other options available
Surge protection	IMAX 10kA		Working temperature	-40 to +50 °C
LED chips	High performance, -140 lm/W		Service life	>50,000 hours
Driver / Dimming	Inventronics / Dimmable 1-10VDC		Warranty	5 years
Luminous Flux	5,500 lm	11,500 lm	Weight	3.5kg 3.8kg
Efficacy	-140lm/W		Dimensions	221mm Wide x 314mm Deep x 110mm High
Colour temperature	5000°K standard. Other options available		Product codes - 40W	FL040WP
CRI	RA >70		- 80W	FL080WP
Light distribution	T3M lenses standard. Other options available			