



tigerlight®

HIGH-PERFORMANCE
INDUSTRIAL LIGHTING

CORSO BULKHEAD SOLAR BULKHEAD LIGHT



CORSO
BULKHEAD



SOLAR POWERED LED BULKHEAD LIGHT WITH INTEGRATED LITHIUM BATTERY AND SOLAR CONTROLLER

Nominal output and scheduling of operation

30w solar panel

Industrial quality Mako Bulkhead light. Output selectable - 4W to 8W - 733 lm to 1348 lm

Compact, tough, simple, convenient, versatile.

CORSO BULKHEAD: Panel 30W. Battery 15.6Ah-186Wh. Bulkhead light output 4-8W 733-1348 lm

SELECTABLE OUTPUT

(CCT = 4000°K)

LAMP POWER	LUMENS
4W	733 lm
6W	1070 lm
8W	1348 lm

LIGHT OUTPUT PROGRAMS

- 1 Dusk to dawn
- 2 4 hours after dark then off.

Output programs selectable via dip switches inside the bulkhead light.

BATTERY AUTONOMY

@4W output	37.5 operating hours
@6W output	25 operating hours
@8W output	19 operating hours



APPLICATIONS

Shelters, doorways, storage sheds, shipping containers, garages, parks, mining camps, toilet blocks, muster points, illumination of signage.

INSTALLATION INSTRUCTIONS



◀ Scan the QR code to view a brief video on installation instructions.

PRODUCT CODES




CORSO BULKHEAD	SRCBULK30-T5W-40K	(With T5W wide optical lenses & 4000K CCT)
OPTIONAL BRACKET	SLBULK-BKT	(Bracket optional extra)



CORSO BULKHEAD

LUMINAIRE / SOLAR PANEL / BATTERY / CABLE

Bulkhead luminaire:	Mako Bulkhead light, 12VDC
LED chipset:	Nichia 219
CCT options:	3000 & 4000K standard. Amber, 2200, 5000K, green, blue, red options
Optical lenses:	T5W standard, T2M, T4M, T60 options.
IP/IK rating:	IP66 / IK10
Dimensions:	381Lx155Wx82mmD Weight 3.9kg.
Solar panel:	30W, 18V, Monocrystalline
Panel rating:	IP68
Dimensions:	594mm x 217mm
Optional flexible panel:	30W, 18V, monocrystalline, 575x263mm.
Battery:	15.6Ah / 186Wh, Lithium Ion
Battery cycles:	>2000.
Controller:	Smart controller with integrated battery management system
Selectable outputs & autonomy:	4W output - 733 lm - 37.5 operating hours 6W output - 1070 lm - 25 operating hours 8W output - 1348 lm - 19 operating hours
Operating temp:	-20 to +65°C
Construction:	Aluminium, powder-coated Luminaire lens - tempered glass Fixings - 304 stainless steel
Interconnecting Cabling:	True Plug & Play connectivity. Solar unit pre-fitted with 3m of cable Maximum cable length between panel and light head is 10m with 1.5mm ² cable
Optional extras:	Optional bracket for light head Optional flexible solar panel
Warranty:	3 years.

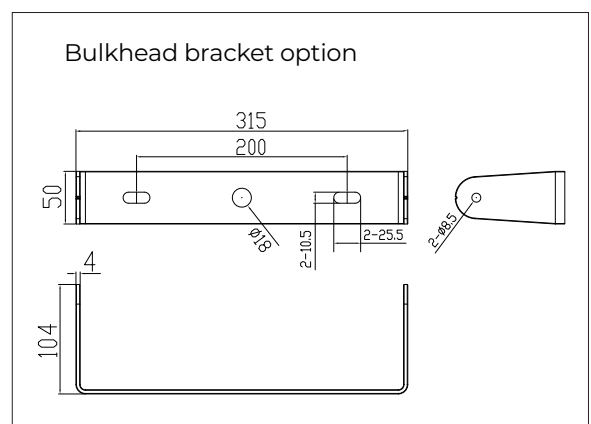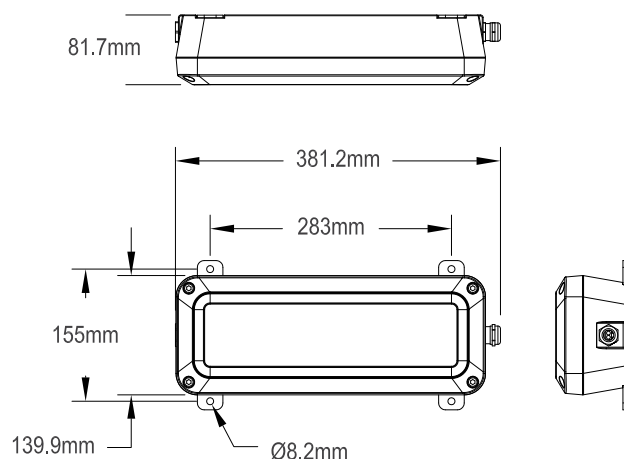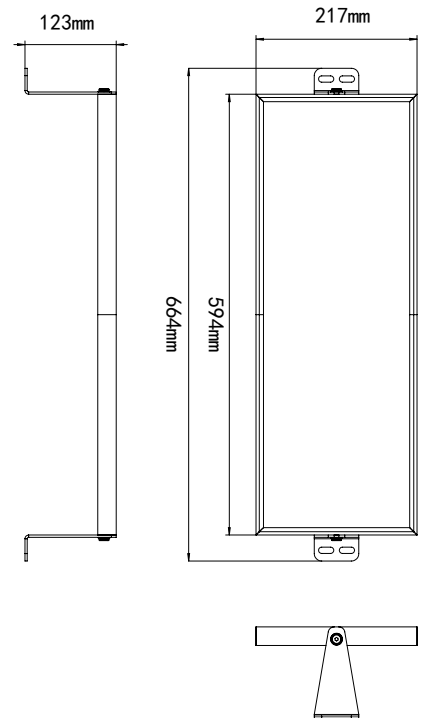



tigerlight®

tigerlight.com.au

T 1300 184 437
F 02 9913 8876
E info@tigerlight.com.au

LinkedIn  Tigerlight Pty Ltd

**National Support &
Distribution Centre**
Unit 8, 1 Vuko Place,
Warriewood, NSW 2102

 **TigerlightLED**

**Western Australia
Office & Warehouse**
Unit 3, 1 Distinction Road,
Wangara, WA 6065

All documentation is subject to change without notice. © 20240517

