



tigerlight®

Leaders in energy efficient lighting



Tiger LED Bunker Light

10W surface-mounted ceiling/wall light

Economical and energy-efficient
Surface-mounted on ceilings and walls
Rugged IP65 casing for indoor or outdoor use.



Bright 800 lumens light output

High performance frosted diffuser
Uniform, diffused light quality with minimum light loss
Cool white 4,000K light.

Economical running over many years

Only 10W power consumption
Heavy-duty power supply specification for 24/7 usage
35,000+ hour service life. 3 year warranty.

IP65 Low maintenance fitting

Indoor or outdoor usage
IP65 rated - waterproof dustproof and insectproof
Rugged, impact-resistant polycarbonate construction
Vibration-proof
No glass diffuser. No glass tube.

Environmentally superior

No mercury
100% recyclable.

Applications

General commercial and industrial lighting applications:

Including corridors, landings, stairwells and walkways

Security lighting, entrances and exits


Other 24/7 lighting applications where maintenance is an issue.



Exclusive Australian Partner

AZ e-lite

Compact surface-mounted fitting. 8in / 205mm diameter.

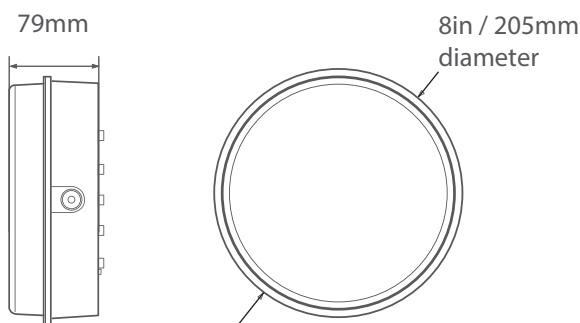

Technical parameters

Power consumption	10W
Lumen output	800 lm
Colour temperature	Cool White 4000K
Colour rendering index (CRI)	>80
Input voltage	100-240VAC / 50-60Hz
Power factor	>0.9
Composition - diffuser/casing	PMMA - white/ABS
Type of LED	SSL Class Low Power 3020 LEDs
Service life	35,000+hours
Operating temperature	0-40 °C
IP Rating	IP65
Dimensions (Diam x Height)	205mm x 79mm
Product code	DABUNK10CW

tigerlight®
www.tigerlight.com.au

t: 1300 184 437
f: 02 9913 8876
e: info@tigerlight.com.au

National Support Centre:
Unit 8, 1 Vuko Place,
Warriewood,
NSW, 2102

Local branches in Sydney
& NSW North Coast,
Melbourne, Brisbane,
Adelaide, Perth