



# Tiger LED ShopFitter

16W - 6 inch | 24W - 6 inch & 8 inch

16W replaces 2x18W PL-C/PL-T compact fluoros  
24W replaces 2x26W PL-C/PL-T compact fluoros  
Cuts power costs by up to 40%



## Ideal for retrofitting existing retail and commercial installations

Deliver up to 40% energy savings compared to CFLs  
Bright: 16W produces 1000-1200 lm, 24W 1500-1800 lm  
Dimmable with common universal or trailing edge dimmers.


## Architectural finish

Sleek modern appearance in the ceiling  
Rugged diecast aluminium body powder-coated white  
PMMA diffuser - no glass.

## Dependable long-life performance reduces ongoing maintenance

Service life is 35,000+ hours.

Lens diameter:	6 inch	8 inch
Overall diameter:	185mm or 7.3 in	244mm or 9.6 in
Cut-out diameter:	175mm or 6.9 in	225mm or 8.9 in

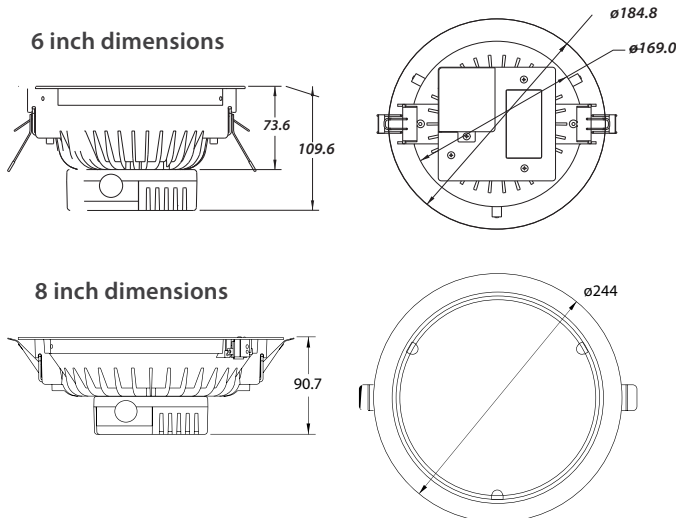

## Applications

Retail recessed ceiling lighting  
Office, lobby and corridor lighting.



Exclusive Australian Partner

**AZ e-lite**

## Technical parameters

Power consumption	16W	24W
Overall Size	6 inch	6 inch & 8 inch
Lumen output	1000 lm - 1200 lm	1500 lm - 1800 lm
Colour temperature	4000K (CW)	6500K (DL)
LED type	Nichia	
Input voltage	220-240V AC, 50/60Hz	
CRI	>80	
Beam angle	78°	
IP Rating	IP44 (trim only)	
Product lifespan	35,000+ hours	
Operating temp	-20° to +40° C	
Certification	CE, C-TICK & ROHS approval	
Warranty	3 years	
Hardware fitting	Diecast aluminium, powder coated white	
Diffuser	PMMA	
Dimmer supported	Leading/trailing edge phase cutting	
Order code - 16W 6in	DASR162500/6 CW or DL	
- 24W 6in	DASR242500/6 CW or DL	
- 24W 8in	DASR242500/8 CW or DL	