



Tiger LED Batten - Emergency IP65

Maintained emergency batten - 1200mm - 40W - tubeless design

Energy-efficient maintained emergency batten
 Rated IP65 - Weatherproof, insect-proof
 Robust IK08 construction



Tamper resistant
 Stainless clips have screw holes for extra security if required.

Quality weatherproof batten - tubeless style

Linear-style - no tubes
 Extra-bright - 3800 lumens
 30,000+ hours service life with 2 year warranty

IP65 - waterproof, insectproof & tamper resistant


Sealed with silicon seal and cable gland
 Stainless steel clips, with screw holes for extra security

Exceptional value for money

Low purchase cost for quality LED batten
 Energy efficient - up to 60% saving

IK08 - robust construction

Sturdy polycarbonate diffuser
 Anodised aluminium tray
 Vibration-proof LED strips in fitting.



Applications

Energy-efficient maintained emergency IP65 batten, for internal or external use.

Surface mounted or suspended maintained emergency fittings for:
 warehouses & factories, ports, car parks, restrooms, construction sites, cool rooms, corridors, humid areas, food preparation areas, basements.




Emergency operation - 2 hours duration

Maintained emergency batten.
 Lithium ion battery, with continuous trickle charging
 16 hrs charge time; 2 hrs emergency light duration
 Manual test button inside batten.



Quality packaging for counter stock

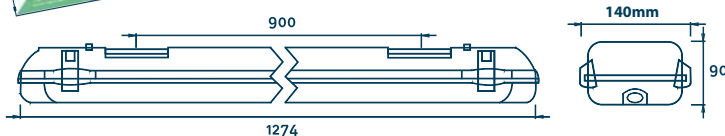

40W Batten: Length: 1274mm Width 140mm Height: 90mm Weight: 2.65kg

Technical parameters

Power consumption	40W (44W total system power)
Fluorescent T8 equivalent	2 x 36W plus ballasts
Lumen output	3800lm
Colour temp / CRI	6000K (Daylight) / >80
Input voltage	240V AC, 50/60Hz
Battery type	LiFePO4
Operation mode	Maintained
Testing system	Manual test button inside batten
Charging time	16 hours
Duration	2 hours
Charging type	Trickle charge
Charger operation	Continuous
IP rating / IK rating	IP65 / IK08
Service life	30,000+hours
Operating temperature	0 to 40°C
Operating humidity	+10 to +85% RH non-condensing
Construction - Body / tray	Polycarb body & diffuser / anodised aluminium
Dimensions LxWxHmm	1274x140x90 (40W)
Weight	2.65kg
Order Code	PYW1200DL-EM (Daylight only)