



MAKO Bulkhead light

30W / 40W LED industrial area light

Wall or ceiling mounted, inside or out
 Maintained Emergency options. Linkable
 High-performance industrial fitting



Performance

30W - 4000 lm. 40W - 5400 lm. ~140 lumens per watt
 50,000+ hour service life.

Heavy-duty construction


- Vibration-resistant, solid state LED fitting.
- State-of-the-art modular construction.
- Quality components for proven performance & reliability
 - 140lm/W performance LEDs & Philips Xitanium driver
 - Heavy-duty cast aluminium protective housing
 - Toughened glass fascia
 - Corrosion-resistant polymer coating
 - Rated IP67 and IK08.

Photometrics

Type T5W lenses - square wide
 (approx equivalent to 120°)


NB Other lens options available as special order.

T5W Type V Square Wide

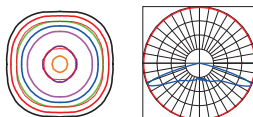

Designed for durability and ease of installation

- Installation is quick and simple
- Driver compartment opens with allen key
- Connect cable to terminal box with quick connectors
- Choice of bracket to suit mounting position
- Linkable - Second cable gland supplied inside for linkage.

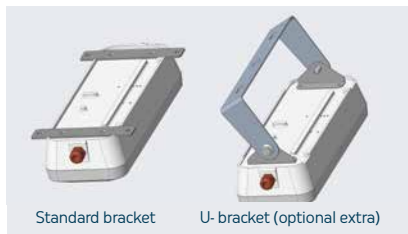

MAINTAINED EMERGENCY OPTION

Built-in battery module provides valuable emergency capability to some or all MAKO fittings on site.

5W emergency output - 3 hour emergency run-time.



MAKO

by tigerlight

Applications

- Low cost industrial-quality area lighting for walls and ceilings, from 2.4 to 6m high.
- Bulkhead lights for indoor or outdoor use.
- For use around industrial plants, mining, outbuildings, storage areas, walkways and gantries.

30W 4000 lm	40W 5400 lm	~140 lm/W	WIDE 120° BEAM	IP 67	5 Year Warranty
--------------------	--------------------	-----------	----------------	-------	-----------------

Linkable. Bracket, Lens, CCT Options

Built-in Maintained Emergency Option

Technical parameters



Power consumption	30W or 40W (nominal)
Input voltage & frequency	120-277VAC; 50-60Hz
LED drive current / PF	30W-530mA, 40W-700mA / >0.95
LED chips / driver	High performance ~140 lm/W / Xitanium
Luminous flux / efficiency	30W-4000lm. 40W-5400lm. ~140lm/W
Colour temperature / CRI	5000K / RA >70
Light distribution	IES Type T5W - square wide ~120 degrees
IP Rating	IP67 (mains cable H07RN-F 3*1.5mm)
Working temp	-40 to 50 °C
Service life	>50,000 hours
Warranty	5 years
Composition - lenses/fascia	Polycarbonate/toughened glass
- Housing/ heatsink	Cast Aluminium
- Protective coating	Polyester (100µm min)
Exterior colour	Grey - RAL 7004
Weight / Dimensions LxWxD	3.1kg / 360 x 136 x 83mm
Product code - 30W/40W std	SL040BULK
- Emergency option	SL040BULK-EM