



# Tiger LED IP65 Batten

## Weatherproof LED batten - 25W & 40W - tubeless design

Replaces 1 or 2 x 36W T8 fluorescent battens  
 Rated IP65 - Weatherproof, insect-proof  
 Robust IK08 construction

### Quality weatherproof batten - tubeless style

Linear-style - no tubes  
 Extra-bright 2200 lumens output (25W); 3400 lumens (40W)  
 30,000+ hours service life with 2 year warranty.

### IP65 - waterproof, insectproof & tamper resistant

Sealed with silicon seal and cable gland  
 Stainless steel clips, with screw holes for extra security

### Exceptional value for money

Low purchase cost for quality LED batten  
 Energy efficient - saves up to 60% compared to fluoro batten.

### IK08 - robust construction

Sturdy polycarbonate diffuser  
 Anodised aluminium tray  
 Vibration-proof LED strips in fitting.



Tamper resistant  
 Stainless clips have  
 screw holes for extra  
 security if required.

### Applications

Multi purpose, energy-efficient weatherproof IP65 batten

For internal or external use.

Surface mounted or suspended fittings for:  
 warehouses & factories, ports, car parks, restrooms,  
 construction sites, cool rooms, corridors, humid  
 areas, food preparation areas, basements.

POWER CONSUMPTION	LED	FLUORO T8 EQUIVALENT
IP65 LED batten	25W	1 x 36W T8 fluoro tube with ballast
	40W	2 x 36W T8 fluoro tubes with ballasts




### Technical parameters

	25W	40W
Power consumption	25W	40W
Fluorescent T8 equivalent	1 x 36W	2 x 36W plus ballasts
Lumen output	2200lm	3400lm
Colour temperature	6000K (Daylight)	
Colour rendering index (CRI)	>80	
Input voltage	220/240V AC, 50/60Hz	
Service life	30,000+hours	
Operating temperature	-20 to 40°C	
Construction - Body	Polycarbonate body & diffuser	
Construction - tray	Anodised aluminium	
IP rating	IP65	
IK rating	IK08	
Dimensions LxWxHmm	1274x85x90 (25W)	1274x140x90 (40W)
Weight	1.9kg (25W)	2.9kg (40W)
Order Code - 25W batten	PYW1200SDL (Daylight only)	
- 40W batten	PYW1200DL (Daylight only)	



Quality packaging  
 for counter stock  
 - 40W batten only.

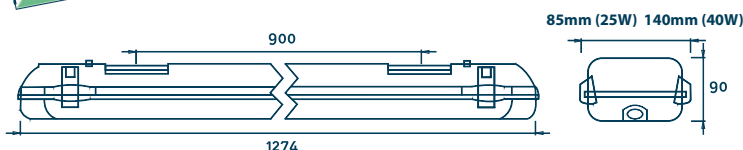

25W Batten: Length: 1274mm Width 85mm Height: 90mm Weight: 1.9kg  
 40W Batten: Length: 1274mm Width 140mm Height: 90mm Weight: 2.9kg